

## Multiscan® 200sx and 100sx Trinitron® Graphic Displays CPD-200SX, CPD-100SX

# SONY


### *Quality image performance at an entry-level price*

- 200sx—17" Trinitron CRT (15.9" viewable image size)  
100sx—15" Trinitron CRT (13.9" viewable image size)
- Digitally-controlled Multiscan technology to support multiple PC and Macintosh® resolutions
- 200sx: Recommended resolution of 1280 x 1024 @ 65 Hz non-interlaced  
100sx: Recommended resolution of 1024 x 768 @ 75 Hz non-interlaced
- Windows® 95, "plug and play" compatible
- Meets or exceeds industry safety standards — International Energy Star, MPRII, NUTEK



INSPIRING VISION

Trinitron

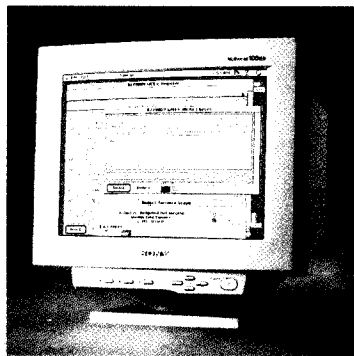

## Multiscan 200sx and 100sx Trinitron Graphic Displays CPD-200SX, CPD-100SX

The Multiscan 200sx and 100sx utilize Sony's Digitally-controlled Multiscan technology to support multiple Macintosh™ and PC resolutions up to a maximum of 1280 x 1024 at 65 Hz (200sx) and 1024 x 768 at 75 Hz (100sx). With vertically flat Trinitron CRTs and anti-reflective coatings, these 17" and 15" Trinitron displays (15.9" and 13.9" viewable image size respectively) improve viewability by minimizing glare. Digital controls allow for precise adjustment of image attributes. In addition, Sony offers color management profiles as an optional accessory with the Multiscan 200sx and 100sx. This software assists with accurate color matching of screen and output. And, the Multiscan 200sx and 100sx displays meet International Energy Star and VESA Display Power Management Signaling standards.

## SPECIFICATIONS

### CRT

Super Fine Pitch™ Trinitron tube  
200sx: 17" measured diagonally  
100sx: 15" measured diagonally  
90° deflection

### VIEWABLE IMAGE SIZE

200sx: 15.9" maximum, measured diagonally  
100sx: 13.9" maximum, measured diagonally

### APERTURE GRILLE PITCH

0.25 mm

### HORIZONTAL SCAN RANGE

200sx: 31–70 kHz  
100sx: 31–65 kHz

### VERTICAL SCAN RANGE

200sx: 50–150 Hz  
100sx: 50–120 Hz

### MAXIMUM RESOLUTIONS

PC (200sx): 1280 x 1024 @ 65 Hz  
PC (100sx): 1280 x 1024 @ 60 Hz  
MAC (Both): 1024 x 768 @ 75 Hz

### PRESET RESOLUTIONS

640 x 480 @ 60 Hz (PC)  
720 x 400 @ 70 Hz (PC)  
800 x 600 @ 75 Hz (PC)  
800 x 600 @ 85 Hz (PC)  
832 x 624 @ 75 Hz (Macintosh)  
1024 x 768 @ 85 Hz (PC) (200sx only)  
1280 x 1024 @ 60 Hz (PC) (200sx only)  
1024 x 768 @ 75 Hz (Macintosh) (200sx only)  
1152 x 870 @ 75 Hz (Macintosh) (200sx only)  
1024 x 768 @ 75 Hz (PC) (200sx only)  
640 x 480 @ 85 Hz (PC) (100sx only)  
1024 x 768 @ 75 Hz (PC) (100sx only)  
1024 x 768 @ 70 Hz (PC) (100sx only)

### COLOR TEMPERATURE

9300 Kelvin

### SIGNAL INPUTS

Analog RGB:  
0.714Vp-p, 75-ohm termination  
External Sync Signals:  
Composite 1 5Vp-p, polarity-free TTL  
Sync on green:  
0.286Vp-p, negative

### POWER REQUIREMENTS

100–120/220–240V AC; 50/60 Hz

### POWER MANAGEMENT

International Energy Star, NUTEK, and VESA DPMS compliant  
200sx Operation: 150 watts (maximum)  
100sx Operation: 120 watts (maximum)  
Suspend: 30 watts (maximum)  
Active off: 8 watts (maximum)

### DIMENSIONS (W X H X D)

200sx: 16.2" x 16.7" x 18.2"  
(411 x 424 x 462 mm)  
100sx: 14.5" x 14.8" x 16.3"  
(368 x 376 x 414 mm)

### WEIGHT

200sx: 44 lbs. (20 kg)  
100sx: 31.3 lbs (14.2 kg)

### OPERATING TEMPERATURE

50°F–104°F (10°C–40°C)

### OPERATING HUMIDITY

10%–80%, non-condensing

### REGULATION COMPLIANCE

Safety: UL 1950  
CSA 950  
EN60950 (TUV,  
GS mark/CE mark)  
SEMKO, NEMKO, EI,  
DEMKO

### REGULATION COMPLIANCE cont.

Emissions/EMI: FCC Class B  
IC Class B  
MPR II (TUV)  
(full compliance)  
CISPR22B  
X-Ray: DHHS  
PTB  
Ergonomics: ZH1/618, ISO 9241-3  
Plug and play: DDC-1, DDC-2B

### FRONT PANEL DIGITAL CONTROLS

On Screen Display (200sx only)  
Power On/Off  
Brightness  
Contrast  
Horizontal Size and Centering  
Vertical Size and Centering  
Pincushion/Keystone Distortion Correction  
Pin Balance  
Key Balance  
Raster Rotation

### SUPPLIED ACCESSORIES

Tilt/swivel stand  
AC power cord  
Windows® 95 inf.file

### INPUT CABLE

Captive 15-pin mini D-sub

### OPTIONAL ACCESSORIES

Provided upon return of registration card:  
Berkeley Systems After Dark® Starter Edition  
with Ecologic™ Power Manager Software  
Available by calling 1.800.352.7669  
Macintosh adapter  
Color management profiles

### LIMITED WARRANTY

Parts and labor: 3 years  
CRT: 2 years



Computer Interface: The computer industry lacks standards, and therefore there are a multitude of varying software packages and add-on hardware options. This monitor is not manufactured to any specific software, and Sony does not and cannot make any warranty or representation with respect to the performance of this product with any particular software packages and/or non-Sony add-on hardware option except those mentioned in this brochure. Sony hereby disclaims any representations or warranty that this product is compatible with any combination of non-Sony products you may choose to connect. While Sony representatives or Sony dealers may be able to assist you and may make recommendations, they are NOT authorized to vary or waive this disclaimer. Purchaser must determine for himself the suitability and compatibility of the hardware and software in each and every particular instance.

© 1996 Sony Electronics Inc. All rights reserved.  
Reproduction in whole or in part without written permission is prohibited.

Sony, the Inspiring Vision, Trinitron logo, Multiscan, Super Fine Pitch, and Trinitron are trademarks of Sony. Windows is a trademark of Microsoft Corporation. Macintosh is a trademark of Apple Computer, Inc. Intuit and Quicken are registered trademarks of Intuit Inc. ©1995 Intuit Inc. All rights reserved. After Dark and Ecologic are trademarks of Berkeley Systems.

This monitor is Energy Star Compliant when used with a computer equipped with VESA Display Power Management Signaling (DPMS). As an International Energy Star Partner, Sony Corporation has determined that this product meets the International Energy Star Program for energy efficiency.

Features and specifications are subject to change without notice. Non-metric weights and measurements are approximate.

# SONY®

Sony Electronics Inc.  
Information Technologies of America  
3300 Zanker Road  
San Jose, California 95134  
Customer Support: 1.800.352.7669  
Technical Support: 1.800.376.9551  
Web address: <http://www.sony.com/technology>